

## **Quality Hit. Budget Fit.**



# **Bosch Heavy Duty Designed to outlast all your demands.**





## **GSR 120/140/180 LI/GSR 18 V-EC**

More Power. More Robust.

## **WHY THIS**



**Affordable**Bosch quality at affordable price!



## Durable

Designed with robust housing and battery cell protection

## **TARGET USERS**

- Furniture makers
- Automobile
- Electrical panel fixing



## **Highly Serviceable**

Motor has changeable carbon brushes for easy maintenance and lower TCO

## **GSR 120 LI**



Illuminate dark workspaces for easy working

## **Electronic Cell Protection**

Protects cells from undervolting, excessive current draw and deep discharge to prolong lifetime of batteries







Techinical Data	Unit	NEW! GSR 120	NEW! GSR 140	NEW! GSR 180	GSR 18 V-EC
Part Number		0 601 9F7 000	0 601 9F8 0K0	0 601 9F8 1K0	0 601 9D6 141
Voltage	V	12	14.4	18	18
Battery capacity	Ah	1.5	1.5 - 4.0	1.5 - 6.3	1.5 - 6.0
No load speed (1st/2nd)	rpm	0 - 380 / 0 - 1300	0 - 450 / 0 - 1700	0 - 450 / 0 - 1700	0 - 420 / 0 - 2000
Torque (Hard/Soft)	Nm	30 / 13	50 / 18	54 / 21	75 / 47
Max. screw diameter	mm	7	8	10	10
Max. drilling (Wood/Steel)	mm	20 / 8	32 / 10	35 / 10	82 / 13
Chuck size	mm	10	13	13	13
MRP	₹	8813	11565	13340	26720
Classification					HEAVY DUTY

Chuck size	mm	10	13	13	13
MRP	₹	8813	11565	13340	26720
Classification					HEAVY DUTY

## GDR 120 Li/GDR 14.4/18 V-EC/GDX 14.4/18 V-EC

High on efficiency! Low on price! Powered to bolt!

## **WHY THIS**



**Affordable** 

Bosch quality at affordable price!



#### **Durable**

Always the right power for variety of applications with 2-level power control

## TARGET USERS

- Auto ancillary assembly
- Modular chair assembly
- Modular kitchen installers
- HVAC installers
- Door & window installation



#### **Highly Serviceable**

Easy maintenance, handling and compact design with insert battery

## **GDR 120 LI**

## Robust design and easy to repair

4 screws to connect tool head and housing

### Higher visibility ofworking area

Due to LED light under bit holder

### **Compact design**

Due to shift from 10.8V slide in pack To insert pack platform



Always the right power for variety of applications 2-level power control



**Cover most of standard** size applications Sufficient torque (GDR 100Nm)

## Flexible power system

All Bosch 10.8/ 12V Li-lon battery (1.5Ah - 4.0Ah)







Techinical Data	Unit	NEW! GDR 120	GDR 14.4 V-EC	GDR 18 V-EC	GDX 14.4 V-EC	GDX 18 V-EC
Part Number		0 601 9F0 0K1	0 601 9B9 2F0	0 601 9B9 3F0	0 601 9B9 0F0	0 601 9B9 1F0
Voltage	٧	12	14.4	18	14.4	18
Battery capacity	Ah	1.5	2.0/4.0	2.0/4.0	2.0/4.0	4
No load speed (1st/2nd)	rpm	0 - 1300/0 - 2600	0 - 2800	0 – 2800	0 - 3200	1100 <b>–</b> 2600 / 3200
Torque (hard screwdriving applications)	Nm	100	160	170	175	185
Max. screw diameter	mm	8	M 6 – M 14	M 6 – M 14	M 6 – M 16	M 6 – M 16
Rated impact rate	bpm	0 - 1900/0 - 3200	0 - 3200	0 - 3200	0 - 3200	0 - 3200
Bit holder		¼" hexagon socket	1/4" internal hexagon	1/4" internal hexagon	1/4" internal hexagon 1/2" external square	1/4" internal hexagon 1/2" external square
MRP	₹	-	30210	30520	33140	35940
Classification			HEAVY DUTY	HEAVY	HEAVY DUTY	HEAVY DUTY

## GDS 14.4 /18 VLI/18 V EC/18 VLi HT/GDS 250 Li-ABR

Highest speed and endless power for tough jobs

## **WHY THIS**



**Affordable**Bosch quality at affordable price!



#### **Durable**

Always the right power for variety of applications with 2-level power control


## TARGET USERS

- Tyre assembly
- Engine overhaul
- Scaffolding contractors



#### **Highly Serviceable**

Easy maintenance, handling and compact design with insert battery

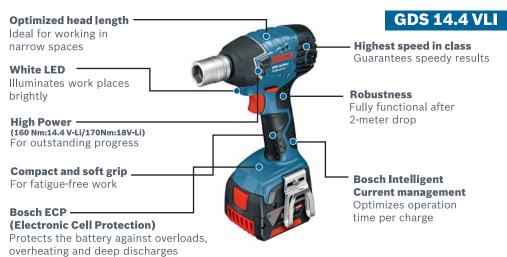





Techinical Data	Unit	GDS 14.4 V Li	GDS 18 V Li	GDS 18 V-EC	GDS 18 V Li HT	NEW! GDS 250 Li ABR
Part Number		0 601 9A1 TF2	0 607 9A1 SF2	0 601 9D8 1F0	0 601 9A1 3F2	0601 9F8 0F0
Voltage	V	14.4	18	18	18	18
Battery capacity	Ah	4	4	4	4	1.5 - 6.3
No load speed (1st/2nd)	rpm	0-2,800	0-2,800	0 - 2.400	0 - 1.900	0 - 2,400
Torque (hard screwdriving applications)	Nm	160	170	250	650	250
Standard bolting capacity	mm	M6 - M16	M6 - M16	M 10 – M 18	M 12 – M 20	M 12 – M 20
Rated impact rate	bpm	0-3,200	0-3,200	0 - 3400	0 - 2100	0 - 3,300
Bit holder	-	12.7 mm (1/2") Square	12.7 mm (1/2") Square	1/2" external square	1/2" external square	1/2" external square
MRP	₹	31810	30230	43340	53030	18507
Classification		HEAVY DUTY	HEAVY DUTY	HEAVY	HEAVY	

## **GSB 120 Kit/GSB 180 LI**

More Power. More Robust.

## **WHY THIS**

**Affordable** Bosch quality at affordable price!



## **Durable** Designed with robust housing and battery cell protection

## **TARGET USERS**

- Installers
- Maintenance & repair
- DIY Users



## **Highly Serviceable**

Motor has changeable carbon brushes for easy maintenance and lower TCO

## **GSB 120-LI**



**Electronic Cell Protection** Protects cells from undervolting, excessive current draw and deep discharge to prolong lifetime of batteries







Techinical Data	Unit	GSB 120 Kit	GSB 180 LI
Part Number		0 601 9F3	060 19F8 3K0
Voltage	V	12	18
Battery capacity	Ah	1.5	1.5 - 6.3
No load speed (1st/2nd)	rpm	0 - 400 / 1300	0 - 450 / 1,700
Torque (Hard/Soft)	Nm	28 / 11	54 / 21
Max. drilling diameter (wood/steel/masonry)	mm	19 / 6 / 8	35 / 10 / 8
Max. screw diameter	mm	7	10
Rated impact rate	bpm	18,750	•
Chuck size	mm	10	13
MRP	₹	13240	13340
Classification		(14)	

, , , ,		/	V . / ==		
Max. drilling diameter (wood/steel/masonry)	mm	19 / 6 / 8	35 / 10 / 8		
Max. screw diameter	mm	7	10		
Rated impact rate	bpm	18,750	•		
Chuck size	mm	10	13		
MRP	₹	13240	13340		
Classification					
		<b>.</b>			

## GBH 180 LI/GBH 36 VLI

Built to be as powerful as corded hammers, cordless convenience made affordable

## **WHY THIS**



## **Highly Serviceable**

Motor has changeable carbon brushes for easy maintenance and lower TCO



#### **Corded Performance**

As fast as corded GBH 2-20. Same impact energy, same drilling capacity, same speed

## **TARGET USERS**

- Pest control
- CCTV installers
- Rock climbing
- Electrician / Plumber



All batteries of the same voltage work with all tools in the range

Bosch quality at an affordable price!

## **GBH 180 LI**



For easy handling



High versatility 3 mode drive For drilling, hammer drilling and chiselling

**Quadrilateral shape through** hole for strip

Easy handling for working on scaffolds etc.





Techinical Data	Unit	NEW! GBH 180 Li	GBH 36 V-Li
Part Number		0 611 911 0F2	0 611 906 003
Voltage	V	18	36
Battery capacity	Ah	1.5 - 6.3	4
No load speed	rpm	0 - 1,800	0 - 960
Rated impact rate	bpm	0 - 4,550	0 - 4260
Impact force	J	1.7	0 - 3
Drilling capacity	mm	20	4 - 26 / 8- 16
LED light	-	Yes	Yes
Mode	-	3	3
Weight	kg	2.6 (3.2)	2
MRP	₹	23904	62430
Classification			HEAVY DUTY

## **GAS 14.4/18 VLI/GAS 18 V-1**

Unleash the power with the powerful cordless vacuum cleaner

## **WHY THIS**

# 01

## **Extremely intuitive!**

Quick dust release & washable dust cup



#### Efficiency at its top

High cleaning performance & good run time

## **TARGET USERS**

- HVAC
- Electrician
- Maintenance & repair



#### 2-stage Cyclone technology

For continuous strong suction power - minimal loss of suction (traditional & comp. vacs lose a lot of suction power after short time usage)

#### **Accessories**

Extension Pipe Floor Nozzle Crevice Nozzle



#### Flexible Power System

All batteries of the same voltage work with all tools in the range

## **GAS 18 V-1**

#### Clean-out filter & dust cup

Assemble & disassemble the dust cup in a just a few secs. All parts (excl. filter) are even dishwasher proof!

#### Ergonomic & balanced

Ergonomic handle for easy operation

## 2-stage cyclonic system

Barely any suction performance loss throughout usage





Techinical Data	Unit	GAS 14.4 VLi*	GAS 18 VLi*	NEW! GAS 18V-1*
Part Number		0 601 9C6 0K0	0 601 9C6 1L0	0 601 9C6
Voltage	٧	14.4	18	18
Battery capacity	Ah	1.5	1.5	1.5 - 6.3
Container vol.	ml	0.7 Ltr	0.7 Ltr	650 ml
Technology		-		Cyclone (2-stage)
Max. under pressure	kPa	4	4	7
Max. airflow	I/s	18.7	19.3	11
Run time	min/Ah	-		7
Weight (w/o batt. W/AC)	Kg	1.3	1.4	1.3
MRP	₹	4760	5810	-
Classification		HEAVY DUTY	HEAVY DUTY	HEAVY DUTY

<sup>\*</sup>Battery and charger not part of standard packaging.

## **GAA 18 V-24**

## Charge your USB devices anytime, anywhere!

## **WHY THIS**

## **TARGET USERS**

DIY Users



## **Flexibility**

Power your USB devices anytime, anywhere



#### Flexible power system

Compatible with all 14.4V and 18V Bosch Blue Li-lon batteries



#### **Optimal convenience**

With 2 USB-ports, belt clip and heated jacket adapter



Techinical Data	Unit	GAA 18 V-24
Part Number		1 600 400 JSW
Voltage	V	14.4 - 18
Charging voltage	V	5
Charging current	А	2.4
USB-ports	•	2 (USB 1.0 / 2.0)
Size (L x W x H)	mm	70 x 95 x 40
Weight	kg	0.2

## **Chargers/Battery**

## Maximum run time, superb efficiency and absolute convenience

## GBA 10.8 V 1.5 Ah O-A Professional







Techinical Data	Unit	GBA 10.8 V
Part Number		1 600 A00 1BN
Battery voltage	٧	10.8
Battery capacity	Ah	1.5
Length	mm	51
Width	mm	48
Height	mm	85
Weight	g	200

## GBA 10.8 V 2.0 Ah O-B Professional







Techinical Data	Unit	GBA 10.8 V			
Part Number		1 600 A00 1BT			
Battery voltage	V	10.8			
Battery capacity	Ah	2			
Length	mm	51			
Width	mm	48			
Height	mm	85			
Weight	g	175			

## GBA 14.4 V 4.0 Ah M-C Professional





Techinical Data	Unit	GBA 14.4 V
Part Number		1 600 A00 162
Battery voltage	V	14.4
Battery capacity	Ah	4
Length	mm	98
Width	mm	74
Height	mm	56
Weight	g	500

## GBA 18 V 4.0 Ah M-C Professional





Techinical Data	Unit	GBA 18 V
Part Number		1 600 A00 163
Battery voltage	٧	18
Battery capacity	Ah	4
Length	mm	115
Width	mm	74
Height	mm	56
Weight	g	600

## GBA 36V 4.0 Ah H-C Professional





Techinical Data	Unit	GBA 36V
Part Number		1 600 A00 8AE
Battery voltage	V	36
Battery capacity	Ah	4
Length	mm	158
Width	mm	97
Height	mm	76
Weight	g	1300

## GAL 1130 CV Professional





Techinical Data	Unit	GAL 1130 CV
Part Number		1 600 A00 16R
Charge current	А	3
Charging time	min	45 Min
Input voltage(s)	V	230
Country version	mm	EU
Model	-	Li-ion quick charger
Charge monitoring		Constant-Current, Constant-Voltage charging control
Weight, approx.	kg	0.43

## GAL 1860 CV Professional





Techinical Data	Unit	GAL 1860 CV
Part Number		1 600 A00 1DH
Charge current	А	3
Charging time	min	45 Min
Input voltage(s)	V	230
Country version	mm	EU
Model	-	Li-ion quick charger
Charge monitoring		Constant-Current, Constant-Voltage charging control
Weight, approx.	kg	0.765

## **Built for Champs -**

**Bosch Battery Technology** 




## **Built for Champs -**

**Bosch EC Brushless Motor** 



# 2X TOOL LIFETIME

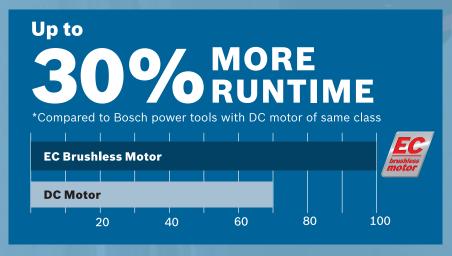

## **WARRANTY TERMS AND CONDITIONS**

Power Tools from Bosch are guaranteed against all material and manufacturing defects for periods mentioned below, from the date of purchase\*. In the event of failure of the tools due to material and manufacturing defects, we undertake to repair the tools free of charge, provided we are satisfied that,

- The power tool has not been tampered with.
- Failure has occurred due to manufacturing / material defect.
- The power tool has been purchased from an accredited dealer.
- The claim has been referred to one of the Bosch Authorized Service Centres along with the power tool, guarantee card and original tool purchase receipt or invoice.

#### This warranty does not cover

- ▶ All normal wear and tear parts like carbon brush, bearings, o-rings etc.
- ▶ Installation to wrong voltage, over load and wrong application.
- Use other than in accordance to handling instructions.
- Unauthorized repair carried out.
- Damage due to any unit caused by accident, misuse, wilful damage, and normal wear, claims arising from loss, fire or other calamities caused by nature or in any way being tampered with.



